


DIY Installation Guide

Reversible Latch Lock



- NO loose parts
- NO need to open lock
- NO tools needed to reverse the lock.

Just pull & turn.





www.gelmar.co.za
Gelmar
Handles & Furniture Fittings



In meeting South African standards SANS 4:2008 a durability test of a 1 000 000 cycles, instead of the regular 100 000 cycles, was conducted without jamming or breaking.

Door Preparation

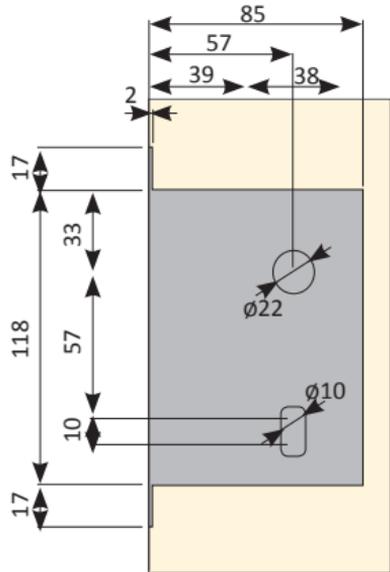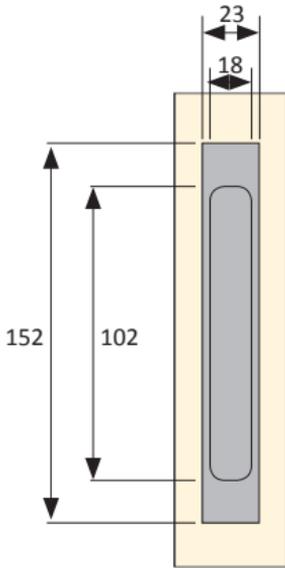

Tools Needed: Drill \varnothing 10mm
 Drill \varnothing 18mm
 Drill \varnothing 22mm
 Chisel 19mm

Fitting Instructions

- Use the lock body as a template to mark off the position of the cut out in the face of the door.
- Drill a row of 18mm deep in the centre of the marked out area.
- Using a chisel, clean out the mortice area between the marked lines.
- Slide the lock into the chiselled hole and draw a line around the faceplate.
- Recess the area inside the lines to a depth of 2mm.
- Hold lock against the side of the door in line with the recess and mark off the key and spindle holes.
- Drill through the door a 22mm diameter spindle hole, and a 10mm key hole.
- If required, pull and turn the latch to match hand of door.
- Place loose faceplate on lock.
- Insert lock into the door. Insert spindle and lock. Screw the lock into the door.
- Screw furniture onto door and turn key. Close door and mark the position of the latch and deadbolt on the door frame.
- Hold striker plate against frame and mark off the plate, latch and deadbolt areas.

Bethlehem	Fourways	Montana	Polokwane	Springfield
Bloemfontein	George	Mt Edgecombe	Nelspruit	Tokai
Boksburg	Hillfox	Newcastle	Port Elizabeth	Weskus
Centurion	Klerksdorp	Newmarket	Pretoria	Welkom
Chatsworth	Margate	Pinetown	Richards Bay	Xavier
East London	Meadowdale	Pietermaritzburg	Sandton	