






DIY Installation Guide

Roller Shutter Door

Gelmar

Roller Shutter Fittings






Roller Shutter

Code	Type	L	H	W	Colour	Finish
360	Slat	3m	11.5	59	Silver	Plastic
370	Slat	3m	11.5	59	Black	Plastic
361	Track	3m			Grey	Plastic
371	Track	3m			Black	Plastic
365	Handle Cover	3m		34.4	Silver	Plastic
367	Handle Cover	1m		34.4	Silver	Plastic
374	Handle Cover	1m		34.4	Black	Plastic
364	Handle Grip	3m	22.4	31.1	Silver	Aluminium

Pre-Pack

Code	Handle Guides	Snail Track	90° Corner Track (Black)	90° Corner Track (Grey)	Finish
368	2	2	-	-	Plastic
369	2	-	-	4	Plastic
375	2	-	4	-	Plastic



The roller shutter door can be configured to one of three possible options:

1. The door can run into the back of the cupboard where it is concealed behind a false back;
2. One door opens onto a set of Snail Tracks behind a false side;
3. Two doors can close in the front middle of the cupboard.




Preparing for Installation

STEP 1


Measure the internal height and width of the cupboard.

Recommended Dimensions:

- The following dimensions are valid for one cabinet door.
- For cabinets with 2 doors, divide the width specified by 2.




Horizontal Application



Horizontal
↔ Sliding direction

Vertical Application



Vertical
↑↓ Sliding direction



Preparing for Installation

STEP 2 Calculate Cutting List



Horizontal Cabinet

Roller Shutter (360) (height)	= internal height	+ 13,5
Roller Shutter (360) (width)	= internal width	+ 30
Aluminium Handle (364)	= internal height	- 20,5
Handle Cover (365)	= internal height	+ 3,5

Installation

STEP 3 Installing the Roller Shutter

Roller Shutter door with Snail Track

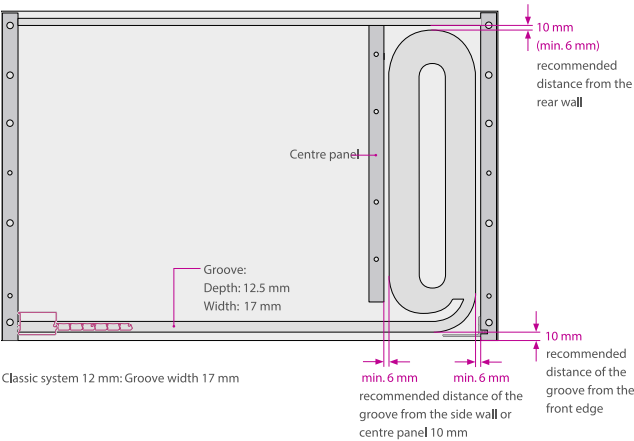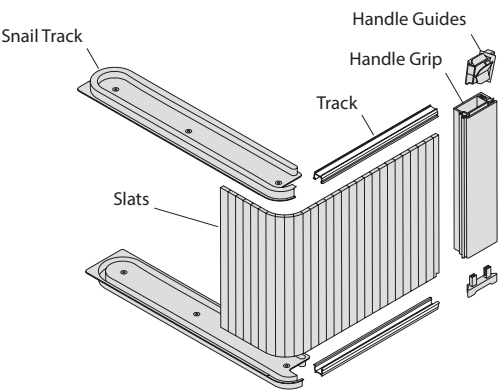

STEP 2

Calculate Cutting List

Vertical Cabinet

Roller Shutter (360) (width)	= internal width	+ 15
Roller Shutter (360) (height)	= internal height	+ 30
Aluminium Handle (364)	= internal width	- 20
Handle Cover (365)	= internal width	+ 4

Installation

STEP 3

Installing the Roller Shutter

Roller Shutter door with 90° Corner Track

